

HIGH-RATE WIRELESS AIRBORNE NETWORK DEMONSTRATION (HiWAND) FLIGHT TEST RESULTS

Russell Franz

**National Aeronautics and Space Administration
Dryden Flight Research Center
Edwards, CA USA**

ABSTRACT

An increasing number of flight research and airborne science experiments now contain network-ready systems that could benefit from a high-rate bidirectional air-to-ground network link. A prototype system, the High-Rate Wireless Airborne Network Demonstration, was developed from commercial off-the-shelf components while leveraging the existing telemetry infrastructure on the Western Aeronautical Test Range. This approach resulted in a cost-effective, long-range, line-of-sight network link over the S and the L frequency bands using both frequency modulation and shaped-offset quadrature phase-shift keying modulation. This paper discusses system configuration and the flight test results.

KEY WORDS

HiWAND, Airborne Internet, SOQPSK, LAN, WAN

INTRODUCTION

Flight research and testing has traditionally featured instrumenting a flight vehicle with a wide variety of sensors and telemetering the measured data to a single mission control center. Typically, a highly-specialized system designed for the sole task of multiplexing data from sensors or other slave systems and generating a pulse code modulation (PCM) output is utilized on the aircraft for providing this data downlink. Today, research and airborne science aircraft are becoming more heavily integrated with network-ready systems and sensors that are inherently capable of high-speed bidirectional communications. The goal of the High-Rate Wireless Airborne Network Demonstration (HiWAND) testing was to utilize existing commercial off-the-shelf (COTS) equipment to provide a high-speed bidirectional network communication link between the aircraft and ground assets identical to that of a wide area network (WAN).

OBJECTIVES

1. Demonstrate that existing IRIG-106¹ telemetry hardware can support high-rate Internet protocol (IP) based bidirectional communications over existing telemetry (TM) bands
2. Use Advanced Range Telemetry (ARTM) Tier I shaped-offset quadrature phase-shift keying (SOQPSK²) modulation for double the bandwidth efficiency of PCM/FM
3. Quantify overall system performance
 - **Data throughput** – Conduct file transfer protocol (FTP) file transfers and transmission control protocol (TCP) and user datagram protocol (UDP) throughput tests.
 - **Packet loss** – Conduct ping tests and transmit UDP packets at various bit rates up to the TM link rate to measure the packets lost
 - **Packet round-trip time** – Conduct ping tests to measure the round-trip time of packets of various sizes to within 1 millisecond.
 - **Repeatability** – Evaluate system performance at the same flight conditions multiple times.
4. Evaluate system performance at 5 Mbps and 10 Mbps TM link rates

SUCCESS CRITERIA

For the purpose of distinguishing between merely transmitting and receiving network data and demonstrating that the system is a viable option to support future flight test programs, the following success criteria were defined.

1. Distance: Demonstrate an operational bidirectional link to a range of at least 150 miles
2. Throughput: Achieve at least 4.5 Mbps data throughput at or beyond the distance criteria.

EXPERIMENT IMPLEMENTATION

HiWAND utilized a TinyRouterTM (TR) (RAD Data Communications, Inc., Mahwah, New Jersey) to provide the interface between ground and aircraft IP-based systems, and the telemetry systems as shown in Figure 1. The TR is a miniature IP router with a local area network (LAN) interface compatible with the IEEE 802.3 (wired Ethernet) standards on a standard RJ-45 connector. HiWAND configured the WAN interface for high-level data-link control (HDLC) protocol over a half-duplex link. The main reason the HDLC protocol was chosen for the WAN interface was that HDLC allows for the generation of a constant bit stream from packetized data by inserting fill bytes (0x7E) during data null periods. It should be noted that this is inherently different than generating a PCM bit stream according to a fixed frame format. For proper SOQPSK modulation and bit synchronization, the HDLC data was randomized prior to TM transmission. HiWAND used a small field-programmable gate array (FPGA) board to randomize and de-randomize the HDLC data.

The ground TM uplink/downlink system was located at the Aeronautical Tracking Facility (ATF) within the Western Aeronautical Test Range³ (WATR) and used a 7-meter reflector. A standard pulse code modulation/frequency modulation (PCM/FM) transmitter was used to

transmit, or uplink, on upper L-band frequencies for all flights. A PCM/FM receiver with either a separate SOQPSK demodulator or a bit synchronizer was used to receive data on S-band or lower L-band frequencies, depending upon the aircraft configuration for a particular flight.

The TM uplink/downlink system on the airplane (a Beechcraft 200 Super KingAir) (Hawker Beechcraft Corporation, Wichita, Kansas) used two separate omni-directional blade antennae on the lower surface of the wings near the fuselage. All flights used a 19-inch rack-mounted PCM/FM receiver and bit synchronizer to receive data on upper L-band frequencies. Different transmitters were tested while troubleshooting a downlink problem encountered during the initial five flights. The downlink transmitter types tested were: 5-Watt S-band SOQPSK, 5-Watt L-band PCM/FM, and 10-Watt S-band PCM/FM. The first six of a total of seven flights were configured for both an uplink and downlink rate of 5 Mbps. The last flight was configured for an uplink rate of 5 Mbps and a downlink rate of 10 Mbps. The overall system configurations are presented in Figure 1, including both SOQPSK and PCM/FM downlink configurations 1 and 2, respectively.

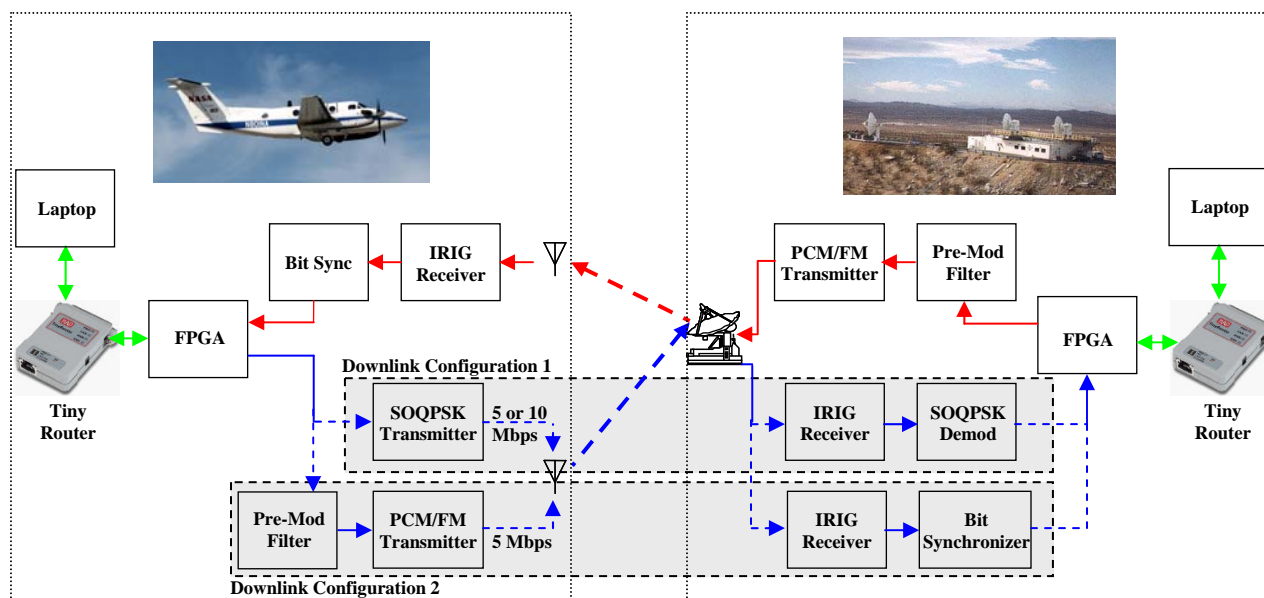


Figure 1. The High-Rate Wireless Airborne Network Demonstration flight-test configurations.

FLIGHT CONDITIONS AND MANEUVERS

All flights were conducted under the following conditions within the normal Super KingAir flight regime:

Altitude	25,000 – 35,000 feet
True Airspeed	250 knots
Maneuvering	Straight & Level
Flight Duration	2 - 3 hours

FLIGHT SUMMARIES

Seven flights were conducted over 18.7 hours of flight time. A description of each flight configuration and results is presented below.

Flight 1 (09/21/05): The SOQPSK transmitter was used for downlink. Ground preflight tests measured the system operating at full performance (approaching 5-Mbps throughput). Data dropouts and inversions were noted while the airplane was taxiing and were not eliminated when the airplane became airborne. Data inversions were corrected manually through the demodulator at the ATF. The data inversions led to low throughput measurements, aborted tests, and high packet losses.

Flight 2 (09/22/05): The SOQPSK demodulator at the ATF was suspected as having contributed to the data dropouts and inversions experienced during Flight 1. The demodulator was replaced before Flight 2; however, there was no measured improvement.

Flight 3 (09/28/05): Because the data dropouts and inversions appeared predominantly in the downlink, the SOQPSK transmitter was replaced with an L-band PCM/FM transmitter and premodulation filter. This reconfiguration eliminated the data inversions, but the throughput still suffered substantially. During Flight 3, it was noted that the throughput increased with decreasing range, as shown in Figure 2. It was also noted that within a range of 35 miles, throughput approached the 5-Mbps limit.

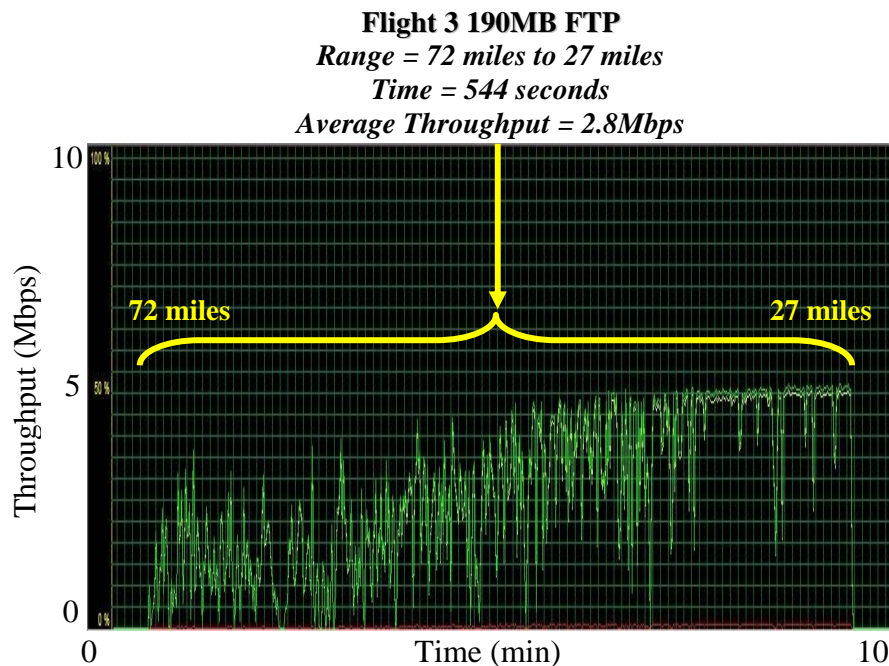


Figure 2. Flight 3 FTP transfer with decreasing range.

Flight 4 (09/29/05): In order to characterize the system, the testing range for Flight 4 was restricted to 35 miles from the ATF. By testing within this limited range, the system throughput was greater than 4.5 Mbps and had few lost packets. It was also noted during Flight 4 that the

deviation of the radio frequency (RF) spectrum was insufficient. The incorrect deviation was attributed to using an airborne transmitter that was configured for a much lower data rate.

Flight 5 (10/11/05): The 5-Watt transmitter having incorrect deviation was replaced with a 10-Watt S-band transmitter having proper deviation. The higher power and correct deviation did not improve the testing range noticeably. Flight 5 attempted to extend the 35-mile testing range, but was unsuccessful. Throughput remained low and packet losses were high, however, relatively large fluctuations in the downlink data rate on the bit synchronizers were noted at the ATF. The system was reviewed and it was determined that there could be a problem with using the clock from the bit synchronizer to drive both the transmit and the receive input clocks on the TR. A new firmware version was loaded to the FPGA board to use an onboard crystal oscillator for the transmit clock and the bit synchronizer clock for the receive clock. This also allowed the transmit rate and receive rate to be independent of each other.

Flight 6 (10/19/05): Flight 6 successfully demonstrated a minimum of 4.5 Mbps throughput to a range of 150 miles with minimal packet loss.

Flight 7 (10/28/05): The original SOQPSK downlink transmitter was reinstalled. The uplink data rate was set to the usual 5 Mbps and the downlink was increased to 10 Mbps. Packet round-trip time as well as the downlink throughput was improved, and packet loss remained minimal. The range was extended to 160 miles, only losing connection when the aircraft was beyond line-of-sight with respect to the ATF. Whereas Figure 2 depicts a single downlink FTP transfer, Figure 3 depicts the end of an uplink test, a non-test period and, a downlink FTP transfer. Comparing these figures shows that a significant performance improvement was achieved from Flight 3 to Flight 7. After correcting the data-clocking problem and reverting to SOQPSK for downlink, the same 190-MB FTP transfer resulted in more than twice the throughput.

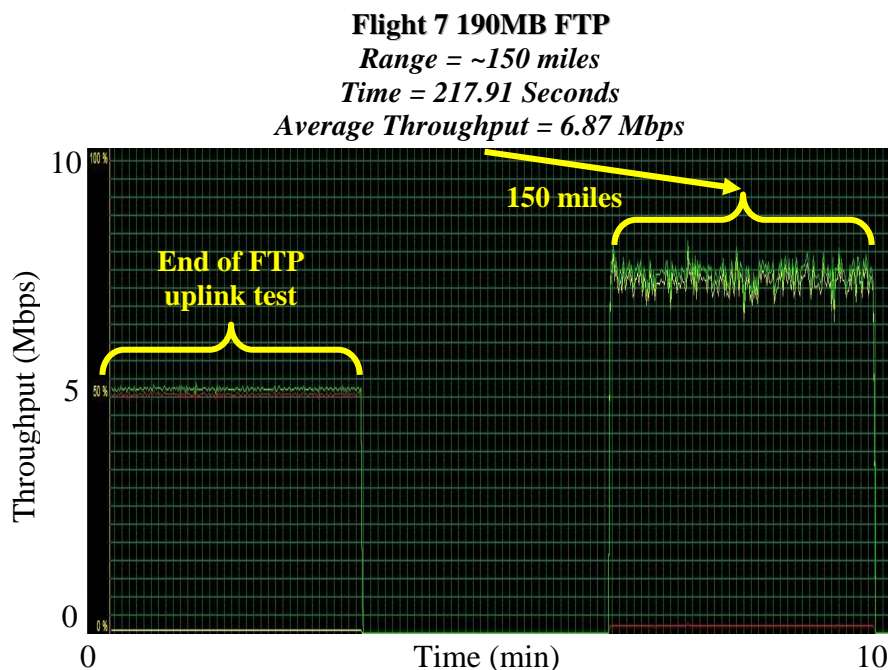


Figure 3. Flight 7 FTP transfer at 150-mile range.

Table 1 provides a summary of each flight configuration.

Table 1. Flight configurations summary.

Flight #	Uplink Transmitter	Uplink Bit Rate	Downlink Transmitter	Downlink Bit Rate	FPGA Clock Sources for TinyRouter™
1	PCM/FM (L-Band)	5Mbps	5-Watt SOQPSK (S-Band)	5Mbps	Receive = Bit synchronizer Transmit = Bit synchronizer
2	PCM/FM (L-Band)	5Mbps	5-Watt SOQPSK (S-Band)	5Mbps	Receive = Bit synchronizer Transmit = Bit synchronizer
3	PCM/FM (L-Band)	5Mbps	5-Watt PCM/FM (L-Band)	5Mbps	Receive = Bit synchronizer Transmit = Bit synchronizer
4	PCM/FM (L-Band)	5Mbps	5-Watt PCM/FM (L-Band)	5Mbps	Receive = Bit synchronizer Transmit = Bit synchronizer
5	PCM/FM (L-Band)	5Mbps	10-Watt PCM/FM (S-Band)	5Mbps	Receive = Bit synchronizer Transmit = Bit synchronizer
6	PCM/FM (L-Band)	5Mbps	10-Watt PCM/FM (S-Band)	5Mbps	Receive = Bit synchronizer Transmit = Internal Oscillator
7	PCM/FM (L-Band)	5Mbps	5-Watt SOQPSK (S-Band)	10Mbps	Receive = Bit synchronizer Transmit = Internal Oscillator

SYSTEM PERFORMANCE

Data throughput

The FTP throughput is shown for each flight in Figure 4. The downlink problem is clearly visible on Flights 1 through 3, and because FTP uses the TCP protocol and requires some bi-directional communication, the downlink problem also resulted in poor FTP uplink performance. The throughput measurements above 4.5 Mbps in Flight 3 occurred within the 35 mile range as did all of the Flight 4 measurements. Although the downlink problem remained during Flight 5, some throughput measurements were high and corresponded to small file transfers of between 1 Megabyte (MB) and 37.5 MB for diagnostic purposes. Larger file transfers of between 37.5 MB and 375 MB were used on all other flights. Flights 6 and 7 were the first flights to fully meet the success criteria. Downlink throughput was much increased during Flight 7 by utilizing SOQPSK modulation at 10 Mbps.

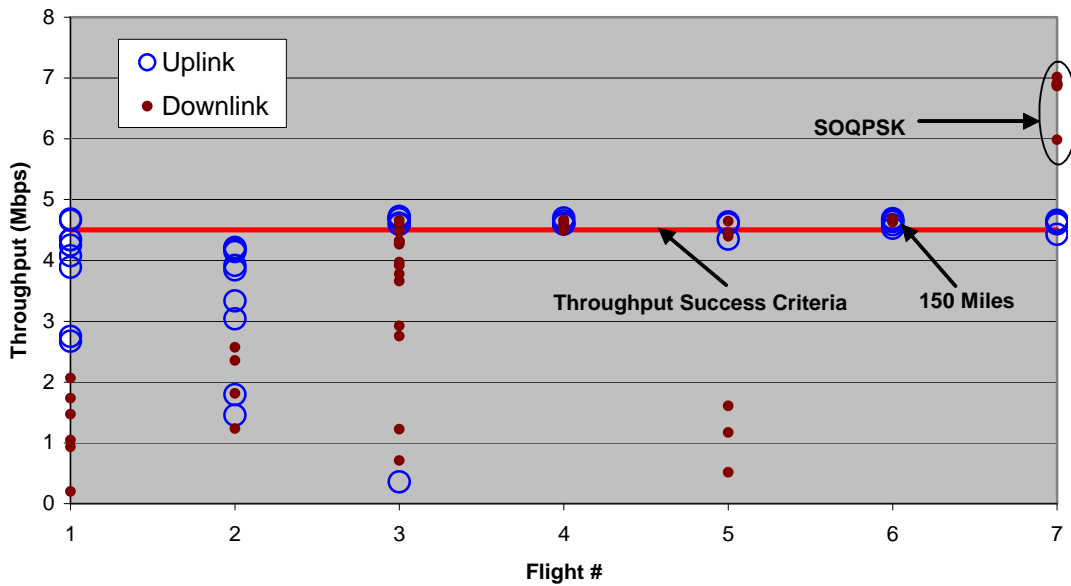


Figure 4. FTP throughput vs. flight number.

Figure 5 shows the throughput for each flight as measured by Iperf⁴, a network performance testing tool. Iperf enables the evaluation of both TCP and UDP transmissions. Both TCP and UDP downlink throughput suffered on Flights 1 and 2. The high throughput on Flights 3 and 4 is attributed to all Iperf tests being conducted within the 35 mile range. One Iperf test was conducted on Flight 5; the majority of that flight used large FTP transfers for troubleshooting. UDP downlink throughput approached the bandwidth of 10 Mbps and was measured at a maximum of 9.4 Mbps during Flight 7.

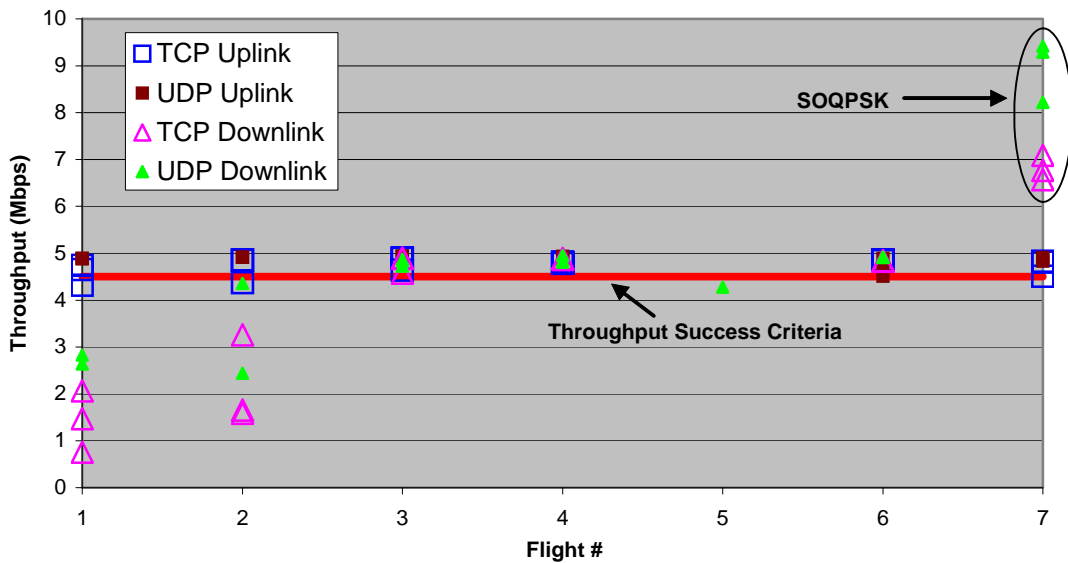


Figure 5. Iperf-measured UDP and TCP throughput vs. flight number.

Packet loss

Two methods were used to measure packet loss: ping tests which required the round trip of packets, and Iperf UDP tests which required only a one way trip of packets. Ping tests occurred at a 1 Hz rate and utilized packets from 32 bytes to 10240 bytes. Iperf tests occurred at the TM link rate and utilized packets from 8000 bytes to 32000 bytes. Because the larger packets were more susceptible to loss from a single bit error, Iperf packet loss results are generally higher.

The percentage of pings lost is shown for each flight, as well as the baseline ground test, in Figure 6. No pings were lost during the baseline. Ping tests were conducted only within the 35 mile range for Flights 3 and 4. It was not until Flights 6 and 7 that the system matched the baseline ground performance at a range of up to 160 miles.

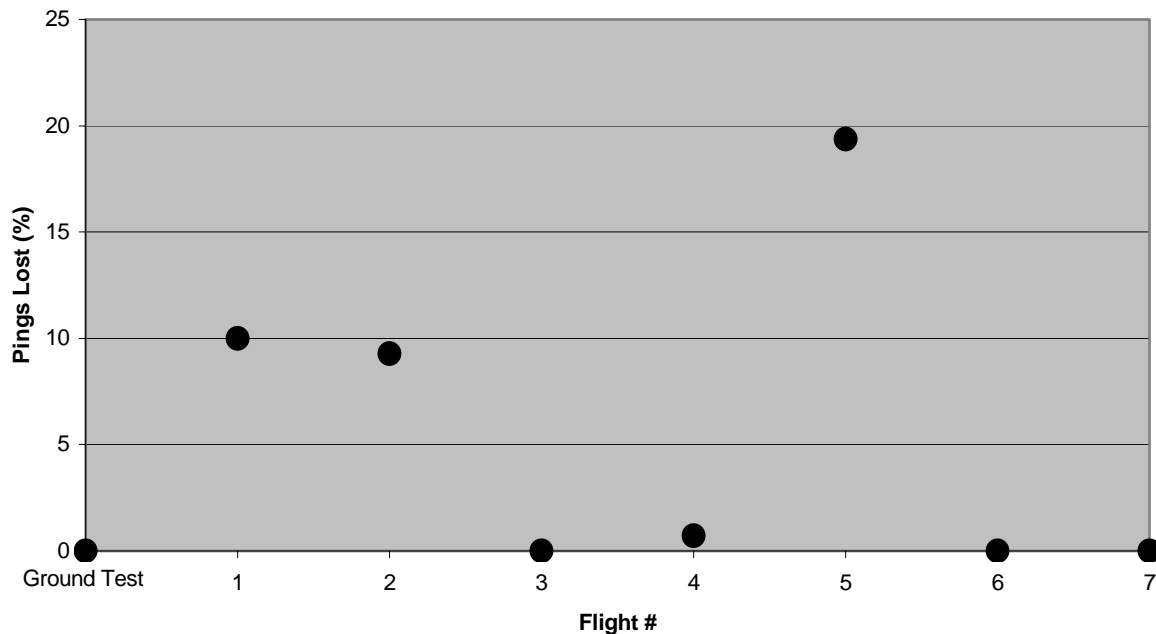


Figure 6. Pings lost vs. flight number.

Figure 7 shows Iperf-measured UDP packet losses for each flight. It is important to note that a single bit error will cause an entire packet to be discarded. If packet size is large and bit errors are randomly located in the data, a low bit error rate (BER) can cause a high packet loss. For example, in Flight 7 three packets were lost out of a total of 157, which is a 2 percent packet loss. This relatively high packet loss, however, could be caused by a bit error rate (BER) as low as $7.3\text{E-}8$, still assuming that a single bit error caused a packet loss. Implementing forward error correction (FEC) algorithms could be beneficial for use in applications in which data retransmission is impossible and data loss is unacceptable.

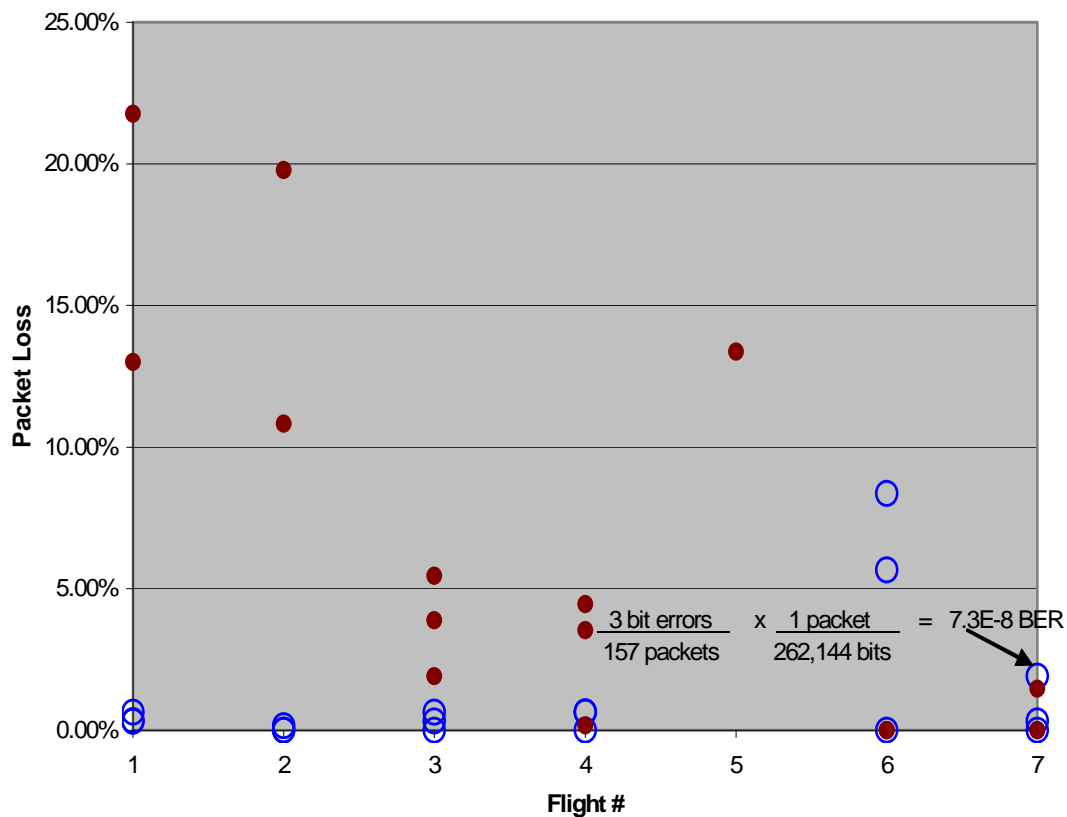


Figure 7. Iperf-measured UDP packet loss vs. flight number.

Packet round-trip time

Ping tests were conducted for all flights to determine packet round trip time, and the ground checkout was used as a baseline. The ground checkout was conducted between the ATF and the aircraft, which was parked 1.7 miles away and in line of sight. One important result to note in Figure 8 is that for large packets of data (10240 bytes), the round-trip time was reduced by more than 5 milliseconds when using the 10 Mbps SOQPSK downlink transmitter during Flight 7.

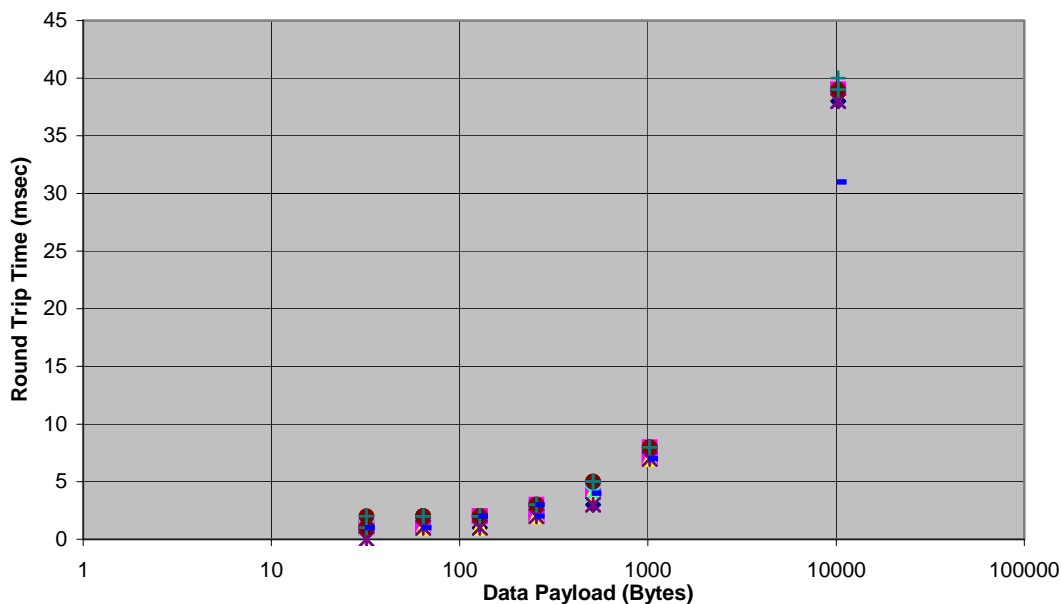


Figure 8. Ping round-trip time vs. data payload.

Flight 7 successfully demonstrated the HiWAND link out to a range of 160 miles at an altitude of 35,000 feet. The link was lost only when the aircraft went beyond line of sight from the ATF. Tall mountains of the Sierra Nevada mountain range, particularly Olancho Peak, prevented testing of the link to the point at which the aircraft was over the horizon. The demonstrated 160-mile range was used to generate the HiWAND area of coverage shown in Figure 9. The actual area of coverage depends on terrain and obstructions to line-of-sight positioning.

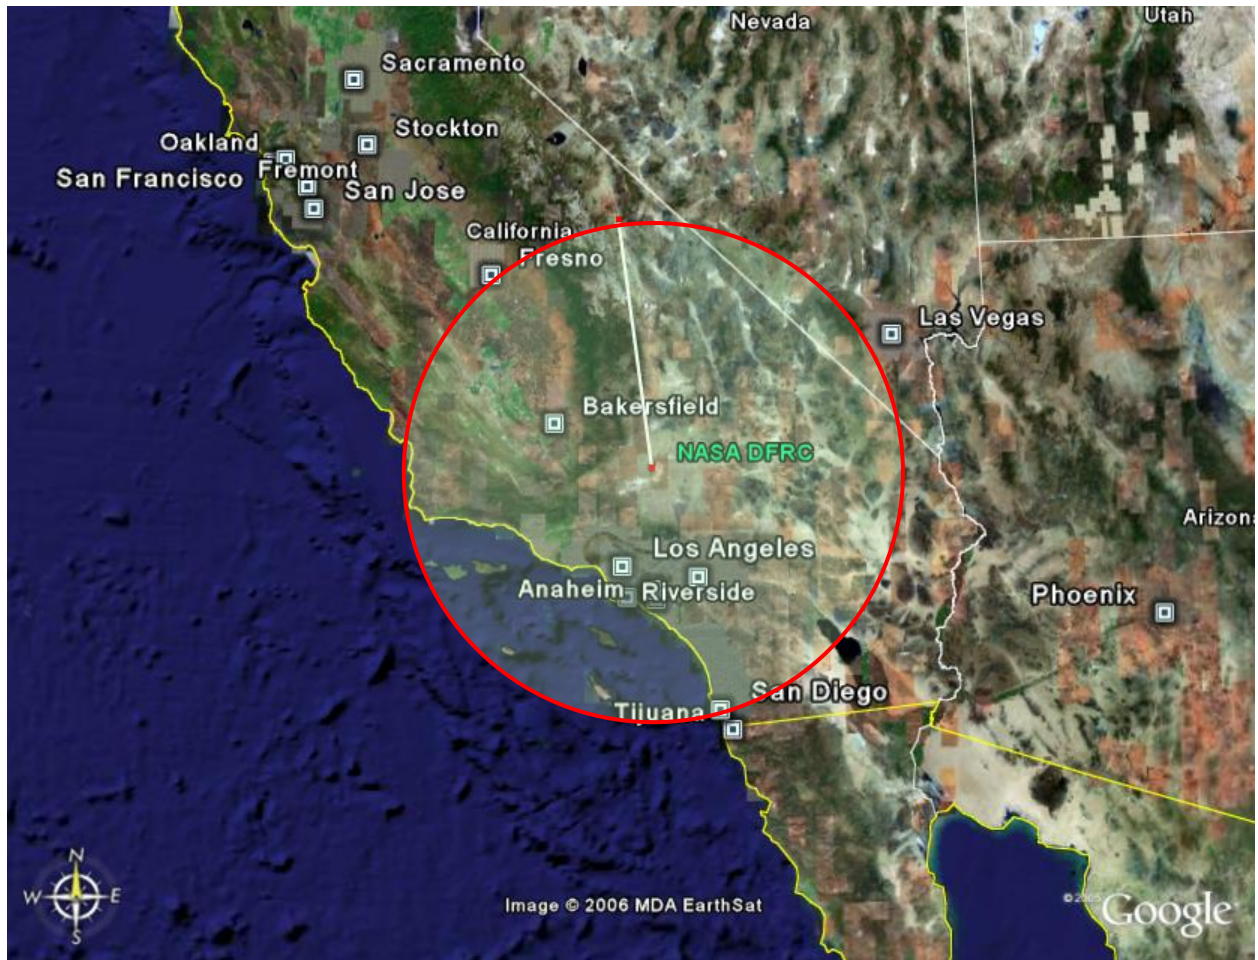


Figure 9. The High-Rate Wireless Airborne Network Demonstration area of coverage.

ADDITIONAL ACCOMPLISHMENTS

- Degraded aircraft UHF communications were augmented by text messaging capabilities provided by the HiWAND link and software.
- Data transfer included both the downlink and uplink of live video
- Test points were remotely initiated from both the ground and aircraft
- Remote Desktop Sharing with encryption was enabled on the dual-homed ground computer and allowed for the following:
 - Remote control of the ground computer from the aircraft
 - Web surfing, which was used to download weather information and satellite imagery
 - Sending and receiving E-mail on the aircraft

CONCLUSIONS

As demonstrated by the High-Rate Wireless Airborne Network Demonstration flight tests, commercial off-the-shelf network equipment can be integrated with existing aircraft and test range assets to provide a high-data-rate bidirectional network connection for flight research and airborne science purposes. For a range exceeding 150 miles, TCP throughput of 4.8 Mbps and UDP throughput of 4.9 Mbps were achieved using PCM/FM modulation over a 5 Mbps TM link. In another configuration, SOQPSK modulation was implemented for the downlink. Because of the improved bandwidth efficiency of SOQPSK compared to PCM/FM, the downlink rate was increased to 10 Mbps. In this configuration, TCP throughput of 7.2 Mbps and UDP throughput of 9.4 Mbps were achieved.

FUTURE WORK

Such a system could also be used in simplex mode if solely a unidirectional uplink or downlink capability was required. It should also be noted that it would be a fairly simple task to configure the system so that the aircraft is one of many nodes on the Internet; to stream multicast data to multiple destinations around the world; and to allow for remote control, reconfiguration, and reprogramming of airborne systems. The system could also be easily integrated with a satellite communications system to enable high-speed over-the-horizon network communications. Future work will involve miniaturization of the receiver and packaging with the transmitter to create a small form factor airborne Advanced Range Telemetry Tier I transceiver that can be used in conjunction with the TinyRouterTM. The new system will enable networking of uninhabited aerial vehicles and high-performance jet aircraft with ground and space assets.

ACKNOWLEDGEMENTS

Imagery from Google Earth Pro 4.0.2416 was used to generate Figure 9.

REFERENCES

1. "IRIG Standard 106-05, Part I – Telemetry Standards," prepared by the Range Commanders Council Telemetry Group. Published by the Secretariat, Range Commanders Council, US Army White Sands Missile Range, New Mexico, 2005.
2. Hill, T., "An Enhanced, Constant Envelope, Interoperable Shaped Offset QPSK (SOQPSK) Waveform for Improved Spectral Efficiency," Proceedings of the International Telemetry Conference, San Diego, California, October, 2000.
3. Western Aeronautical Test Range – WATR
URL: <http://www.nasa.gov/centers/dryden/research/Facilities/WATR/index.html> [cited 14 August 2007].
4. Iperf Version 1.7.0 (<http://dast.nlanr.net/projects/Iperf/>) developed by the National Laboratory for Applied Network Research, March 13, 2003.